



## TYRE DATA BOOKLET

245/645-18 DH

245/645-18 DHB

245/645-18 WH

2020

### *CONTENTS:*

1: INTRODUCTION

2: STATIC DIMENSIONS (DH/DHB/WH)

3: DYNAMIC MEASUREMENTS (DH)

4: DYNAMIC MEASUREMENTS (DHB)

5: DYNAMIC MEASUREMENTS (WH)

6: STATIC RADIAL DEFLECTION (DH)

7: STATIC RADIAL DEFLECTION (DHB)



# ***INTRODUCTION***

## **INTRODUCTION**

This document provides the user with technical information regarding several aspects of the tyre characteristics. The data was acquired using indoor testing methods on physical tyres.

For individual car fitments, usage guidelines and prescriptions for camber and pressure please refer to the relevant Pirelli Technical Booklet, which is included as part of this Pirelli Data Package.



## STATIC MEASUREMENTS

| Slick Tyres                                        |                |               |                           |                  |
|----------------------------------------------------|----------------|---------------|---------------------------|------------------|
| Size & Fitment                                     | Nominal Weight | Max Width (C) | Circumference ( $\pi D$ ) | Tread Width (Cb) |
|                                                    | (kilograms)    | (mm)          | (mm)                      | (mm)             |
| <b>245/645-18</b><br><b>DH</b><br><b>18"x8.0J</b>  | 10.2           | 240           | 2040                      | 240              |
| <b>245/645-18</b><br><b>DHB</b><br><b>18"x9.0J</b> | 10.2           | 256           | 2034                      | 240              |

| Wet Tyres                                         |                |               |                           |                  |
|---------------------------------------------------|----------------|---------------|---------------------------|------------------|
| Size & Fitment                                    | Nominal Weight | Max Width (C) | Circumference ( $\pi D$ ) | Tread Width (Cb) |
|                                                   | (kilograms)    | (mm)          | (mm)                      | (mm)             |
| <b>245/645-18</b><br><b>WH</b><br><b>18"x9.0J</b> | TBA            | TBA           | TBA                       | TBA              |



**DYNAMIC MEASUREMENTS @ 2.0bar (29psi), CA 0.0°**



245/645-18x8.0J DH

**LOADED RADIUS**

|              |     | LOAD [kg] |       |       |       |     |
|--------------|-----|-----------|-------|-------|-------|-----|
|              |     | 150       | 300   | 450   | 600   | 750 |
| SPEED [km/h] | 20  |           |       |       |       |     |
|              | 60  | 320.2     | 315.3 | 310.3 | 304.9 |     |
|              | 100 | 320.8     | 316.1 | 311.0 | 305.6 |     |
|              | 140 | 321.7     | 317.1 | 312.0 | 306.6 |     |
|              | 180 | 323.1     | 318.6 | 313.4 | 308.0 |     |
|              | 220 | 324.7     | 320.1 | 315.0 | 309.6 |     |
|              | 240 | 325.5     | 321.0 | 315.9 | 310.3 |     |
|              | 280 |           |       |       |       |     |
|              | 300 |           |       |       |       |     |

**ROLLING RADIUS**

|              |     | LOAD [kg] |       |       |       |     |
|--------------|-----|-----------|-------|-------|-------|-----|
|              |     | 150       | 300   | 450   | 600   | 750 |
| SPEED [km/h] | 20  |           |       |       |       |     |
|              | 60  | 320.4     | 318.7 | 317.8 | 317.2 |     |
|              | 100 | 320.9     | 319.3 | 318.3 | 317.7 |     |
|              | 140 | 321.9     | 320.2 | 319.2 | 318.6 |     |
|              | 180 | 323.3     | 321.5 | 320.5 | 319.8 |     |
|              | 220 | 324.7     | 323.0 | 322.0 | 321.4 |     |
|              | 240 | 325.6     | 323.8 | 322.8 | 322.2 |     |
|              | 280 |           |       |       |       |     |
|              | 300 |           |       |       |       |     |

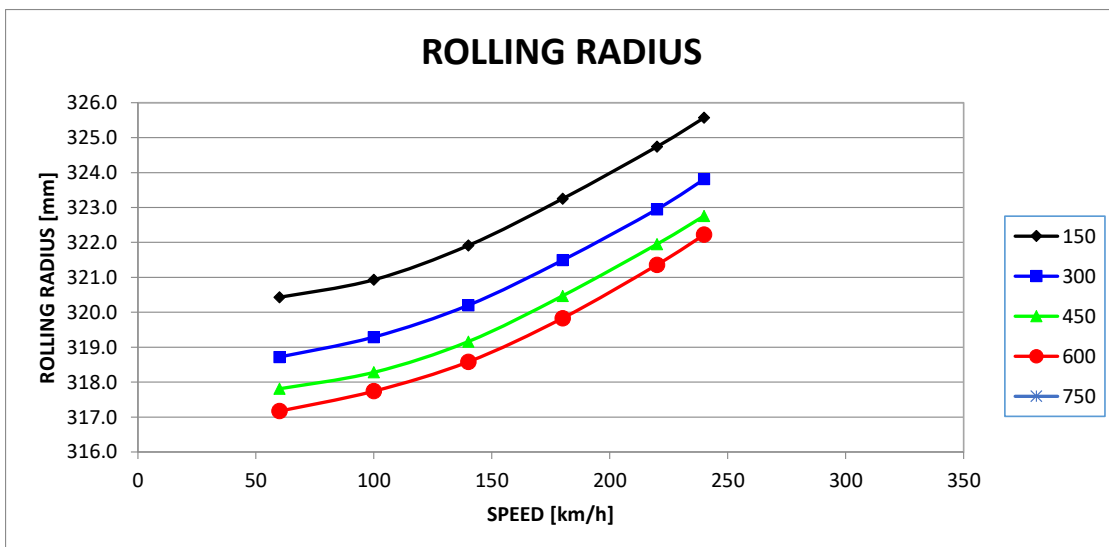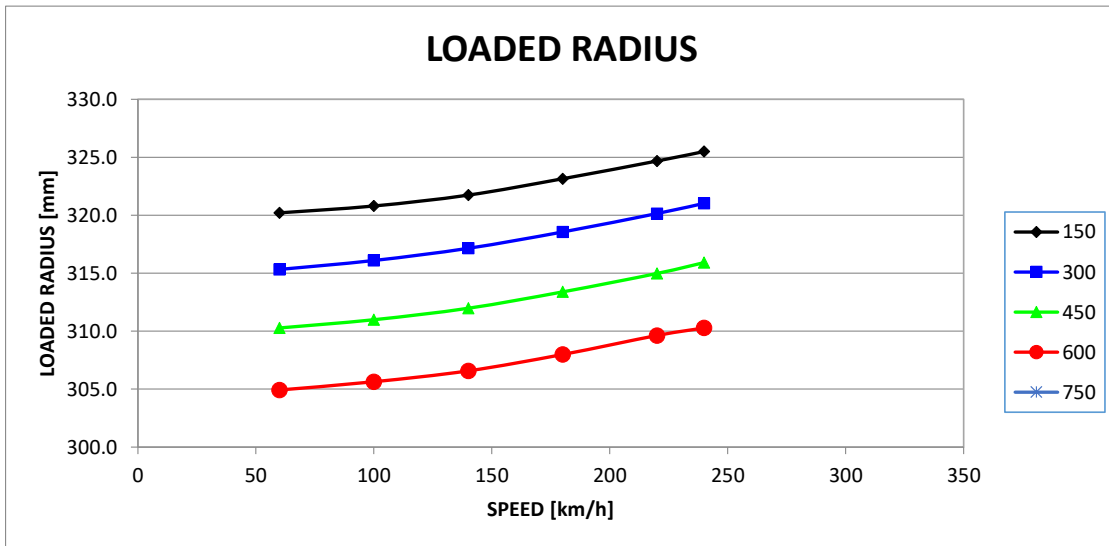



**DYNAMIC MEASUREMENTS @ 2.0bar (29psi), CA 0.0°**



245/645-18x9.0J DHB

**LOADED RADIUS**

|              |     | LOAD [kg] |       |       |       |       |
|--------------|-----|-----------|-------|-------|-------|-------|
|              |     | 150       | 300   | 450   | 600   | 750   |
| SPEED [km/h] | 20  | 319.8     | 315.3 | 310.7 | 306.2 | 301.7 |
|              | 60  | 320.2     | 315.7 | 311.2 | 306.7 | 302.2 |
|              | 100 | 320.8     | 316.3 | 311.9 | 307.4 | 303.0 |
|              | 140 | 321.5     | 317.2 | 312.8 | 308.5 | 304.1 |
|              | 180 | 322.5     | 318.3 | 314.0 | 309.8 | 305.6 |
|              | 220 | 323.7     | 319.6 | 315.5 | 311.4 | 307.3 |
|              | 260 | 325.0     | 321.1 | 317.1 | 313.2 | 309.2 |
|              | 280 |           |       |       |       |       |
|              | 300 |           |       |       |       |       |

**ROLLING RADIUS**

|              |     | LOAD [kg] |       |       |       |       |
|--------------|-----|-----------|-------|-------|-------|-------|
|              |     | 150       | 300   | 450   | 600   | 750   |
| SPEED [km/h] | 20  | 319.9     | 319.0 | 318.1 | 317.2 | 316.3 |
|              | 60  | 319.9     | 319.1 | 318.2 | 317.3 | 316.4 |
|              | 100 | 320.1     | 319.3 | 318.4 | 317.5 | 316.6 |
|              | 140 | 320.6     | 319.7 | 318.9 | 318.0 | 317.1 |
|              | 180 | 321.5     | 320.6 | 319.7 | 318.8 | 318.0 |
|              | 220 | 322.8     | 321.9 | 321.1 | 320.2 | 319.3 |
|              | 260 | 324.7     | 323.8 | 323.0 | 322.1 | 321.2 |
|              | 280 |           |       |       |       |       |
|              | 300 |           |       |       |       |       |

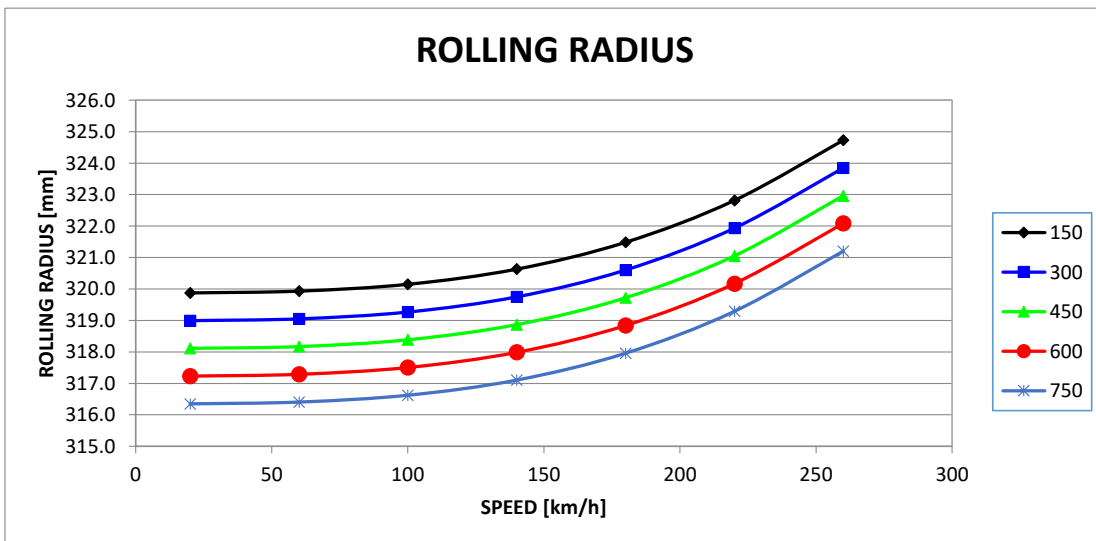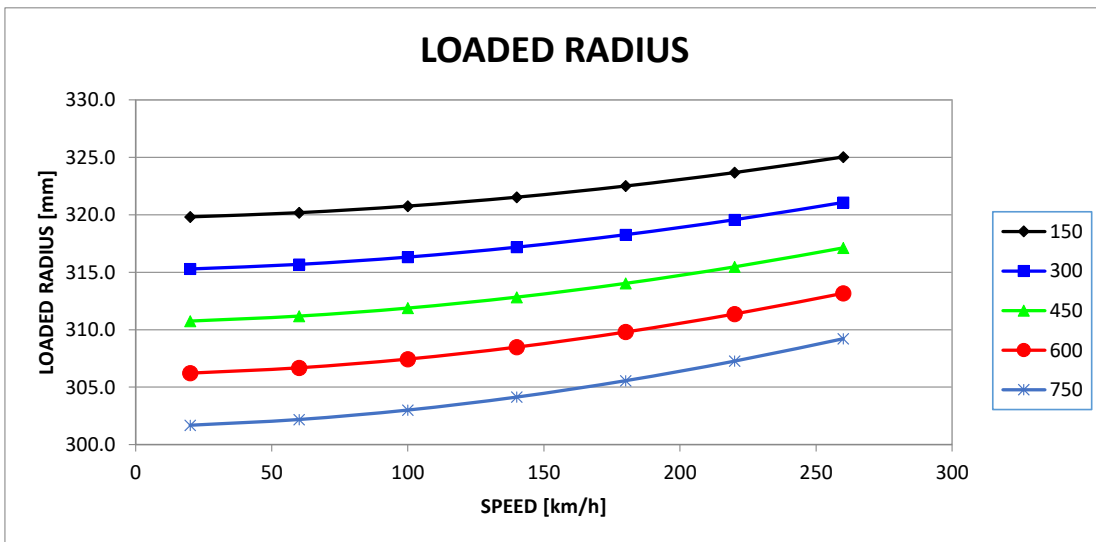



**DYNAMIC MEASUREMENTS @ 2.0bar (29psi), CA 0.0°**



245/645-18x9.0J WH

**LOADED RADIUS**

| SPEED [km/h] | LOAD [kg] |       |       |       |       |       |
|--------------|-----------|-------|-------|-------|-------|-------|
|              | 51        | 153   | 331   | 510   | 637   | 764   |
| 30           | 321.7     | 317.3 | 310.2 | 303.9 | 299.4 | 294.7 |
| 100          | 323.0     | 318.5 | 311.6 | 305.5 | 301.0 | 296.4 |
| 180          | 325.2     | 321.0 | 314.5 | 308.6 | 304.4 | 299.9 |
| 250          | 327.7     | 324.0 | 317.7 | 312.1 | 308.1 | 304.1 |

**ROLLING RADIUS**

| SPEED [km/h] | LOAD [kg] |       |       |       |       |       |
|--------------|-----------|-------|-------|-------|-------|-------|
|              | 51        | 153   | 331   | 510   | 637   | 764   |
| 30           | 322.8     | 320.4 | 318.6 | 317.8 | 317.4 | 317.1 |
| 100          | 323.8     | 321.2 | 319.5 | 318.6 | 318.2 | 318.0 |
| 180          | 325.9     | 323.3 | 321.6 | 320.8 | 320.5 | 320.3 |
| 250          | 328.4     | 325.8 | 324.2 | 323.5 | 323.3 | 323.3 |

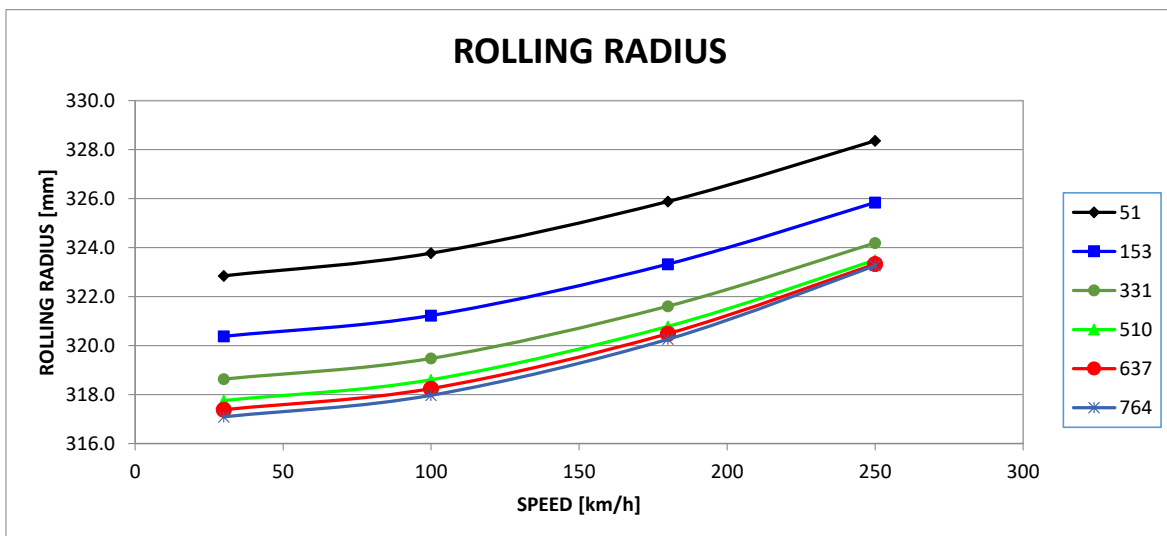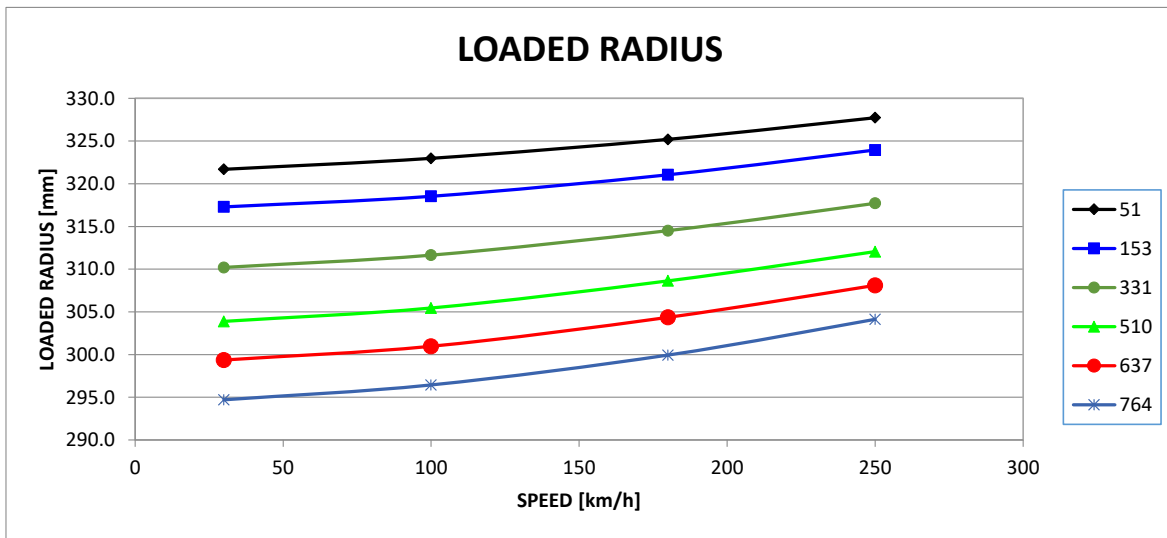




**STATIC RADIAL DEFLECTION – 245/645-18x9.0J @ CA 0.0 ° DH**

| Load [kg] | Inflation Pressure [bar] |      |      |      |      |      |      |
|-----------|--------------------------|------|------|------|------|------|------|
|           | 2.6                      | 2.4  | 2.2  | 2.0  | 1.8  | 1.6  | 1.4  |
| 0         | 0.0                      | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  |
| 25        | 0.5                      | 0.6  | 0.6  | 0.7  | 0.7  | 0.7  | 0.9  |
| 50        | 1.1                      | 1.2  | 1.2  | 1.3  | 1.4  | 1.5  | 1.8  |
| 75        | 1.6                      | 1.7  | 1.9  | 2.0  | 2.1  | 2.2  | 2.6  |
| 100       | 2.2                      | 2.3  | 2.5  | 2.7  | 2.8  | 3.0  | 3.5  |
| 125       | 2.8                      | 2.9  | 3.2  | 3.3  | 3.5  | 3.8  | 4.3  |
| 150       | 3.3                      | 3.5  | 3.8  | 4.0  | 4.2  | 4.5  | 5.2  |
| 175       | 3.9                      | 4.1  | 4.4  | 4.7  | 4.9  | 5.3  | 6.0  |
| 200       | 4.5                      | 4.7  | 5.1  | 5.4  | 5.7  | 6.1  | 6.9  |
| 225       | 5.1                      | 5.4  | 5.7  | 6.1  | 6.4  | 6.8  | 7.7  |
| 250       | 5.6                      | 6.0  | 6.4  | 6.7  | 7.1  | 7.6  | 8.6  |
| 275       | 6.2                      | 6.6  | 7.0  | 7.4  | 7.8  | 8.4  | 9.4  |
| 300       | 6.8                      | 7.2  | 7.7  | 8.1  | 8.5  | 9.2  | 10.2 |
| 325       | 7.4                      | 7.8  | 8.3  | 8.8  | 9.3  | 9.9  | 11.1 |
| 350       | 8.0                      | 8.4  | 9.0  | 9.5  | 10.0 | 10.7 | 11.9 |
| 375       | 8.5                      | 9.0  | 9.6  | 10.2 | 10.7 | 11.5 | 12.7 |
| 400       | 9.1                      | 9.6  | 10.3 | 10.8 | 11.4 | 12.3 | 13.6 |
| 425       | 9.7                      | 10.2 | 10.9 | 11.5 | 12.2 | 13.1 | 14.4 |
| 450       | 10.3                     | 10.8 | 11.6 | 12.2 | 12.9 | 13.8 | 15.2 |
| 475       | 10.9                     | 11.5 | 12.3 | 12.9 | 13.6 | 14.6 | 16.1 |
| 500       | 11.5                     | 12.1 | 12.9 | 13.6 | 14.4 | 15.4 | 16.9 |
| 525       | 12.1                     | 12.7 | 13.6 | 14.3 | 15.1 | 16.2 | 17.7 |
| 550       | 12.7                     | 13.3 | 14.2 | 15.0 | 15.8 | 17.0 | 18.5 |
| 575       | 13.3                     | 13.9 | 14.9 | 15.7 | 16.6 | 17.7 | 19.4 |
| 600       | 13.9                     | 14.5 | 15.5 | 16.4 | 17.3 | 18.5 | 20.2 |
| 625       | 14.5                     | 15.1 | 16.2 | 17.1 | 18.0 | 19.3 | 21.0 |
| 650       | 15.1                     | 15.8 | 16.9 | 17.7 | 18.8 | 20.1 | 21.8 |
| 675       | 15.7                     | 16.4 | 17.5 | 18.4 | 19.5 | 20.9 | 22.7 |
| 700       | 16.3                     | 17.0 | 18.2 | 19.1 | 20.2 | 21.7 | 23.5 |
| 725       | 16.9                     | 17.6 | 18.8 | 19.8 | 21.0 | 22.4 | 24.3 |
| 750       | 17.5                     | 18.2 | 19.5 | 20.5 | 21.7 | 23.2 | 25.1 |
| 775       | 18.1                     | 18.8 | 20.2 | 21.2 | 22.4 | 24.0 | 26.0 |
| 800       | 18.7                     | 19.5 | 20.8 | 21.9 | 23.2 | 24.8 | 26.8 |



**STATIC RADIAL DEFLECTION – 245/645-18x9.0J @ CA 0.0° DH**

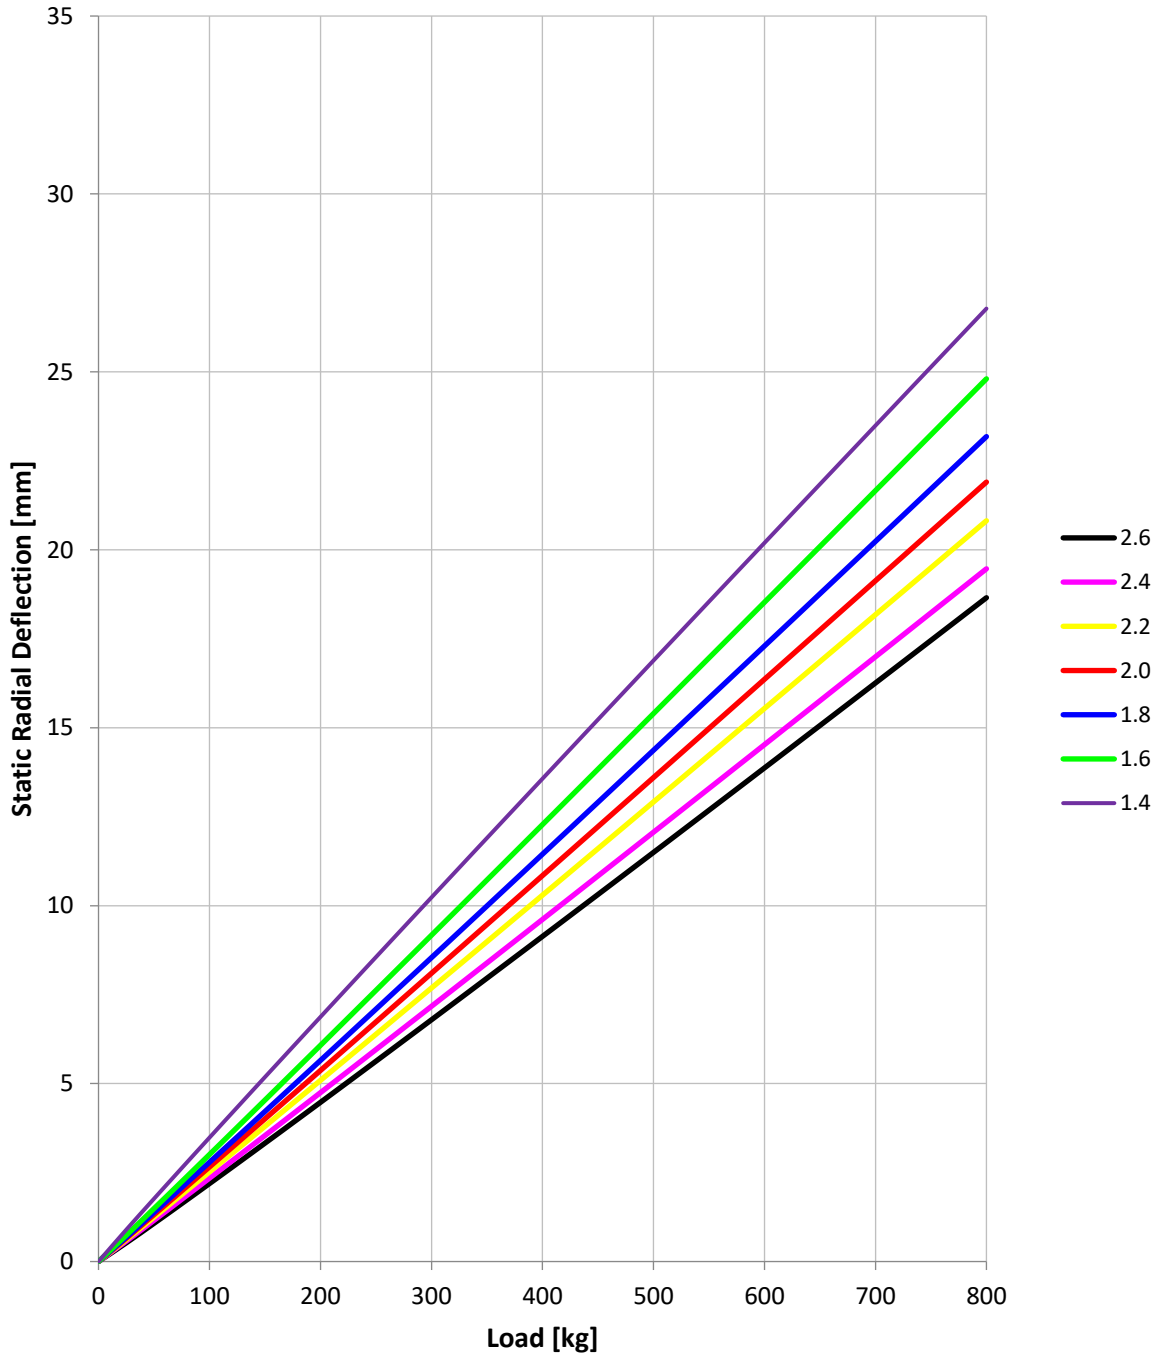






**STATIC RADIAL DEFLECTION – 245/645-18x9.0J @ CA -3.0 ° DH**

| Load [kg] | Inflation Pressure [bar] |      |      |      |      |      |      |
|-----------|--------------------------|------|------|------|------|------|------|
|           | 2.6                      | 2.4  | 2.2  | 2.0  | 1.8  | 1.6  | 1.4  |
| 0         | 0.0                      | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  |
| 25        | 0.6                      | 0.6  | 0.8  | 0.8  | 1.0  | 0.9  | 1.0  |
| 50        | 1.3                      | 1.3  | 1.5  | 1.6  | 1.9  | 1.8  | 1.9  |
| 75        | 1.9                      | 1.9  | 2.2  | 2.3  | 2.7  | 2.6  | 2.8  |
| 100       | 2.5                      | 2.5  | 2.9  | 3.0  | 3.5  | 3.4  | 3.7  |
| 125       | 3.1                      | 3.2  | 3.6  | 3.8  | 4.3  | 4.3  | 4.6  |
| 150       | 3.7                      | 3.8  | 4.2  | 4.5  | 5.1  | 5.1  | 5.5  |
| 175       | 4.3                      | 4.4  | 4.9  | 5.2  | 5.9  | 5.9  | 6.4  |
| 200       | 4.9                      | 5.0  | 5.6  | 5.9  | 6.7  | 6.7  | 7.2  |
| 225       | 5.5                      | 5.7  | 6.3  | 6.6  | 7.4  | 7.5  | 8.1  |
| 250       | 6.1                      | 6.3  | 6.9  | 7.3  | 8.2  | 8.3  | 9.0  |
| 275       | 6.6                      | 6.9  | 7.6  | 8.0  | 9.0  | 9.1  | 9.8  |
| 300       | 7.2                      | 7.5  | 8.3  | 8.8  | 9.7  | 9.9  | 10.7 |
| 325       | 7.8                      | 8.1  | 8.9  | 9.5  | 10.5 | 10.7 | 11.5 |
| 350       | 8.4                      | 8.8  | 9.6  | 10.2 | 11.2 | 11.5 | 12.4 |
| 375       | 9.0                      | 9.4  | 10.2 | 10.8 | 12.0 | 12.3 | 13.2 |
| 400       | 9.6                      | 10.0 | 10.9 | 11.5 | 12.7 | 13.1 | 14.0 |
| 425       | 10.2                     | 10.6 | 11.6 | 12.2 | 13.4 | 13.8 | 14.9 |
| 450       | 10.7                     | 11.2 | 12.2 | 12.9 | 14.2 | 14.6 | 15.7 |
| 475       | 11.3                     | 11.9 | 12.9 | 13.6 | 14.9 | 15.4 | 16.5 |
| 500       | 11.9                     | 12.5 | 13.5 | 14.3 | 15.6 | 16.2 | 17.4 |
| 525       | 12.5                     | 13.1 | 14.2 | 15.0 | 16.3 | 17.0 | 18.2 |
| 550       | 13.1                     | 13.7 | 14.8 | 15.7 | 17.0 | 17.7 | 19.0 |
| 575       | 13.7                     | 14.3 | 15.5 | 16.4 | 17.8 | 18.5 | 19.8 |
| 600       | 14.2                     | 14.9 | 16.1 | 17.1 | 18.5 | 19.3 | 20.7 |
| 625       | 14.8                     | 15.5 | 16.8 | 17.7 | 19.2 | 20.0 | 21.5 |
| 650       | 15.4                     | 16.2 | 17.4 | 18.4 | 19.9 | 20.8 | 22.3 |
| 675       | 16.0                     | 16.8 | 18.1 | 19.1 | 20.6 | 21.6 | 23.1 |
| 700       | 16.6                     | 17.4 | 18.7 | 19.8 | 21.3 | 22.4 | 23.9 |
| 725       | 17.1                     | 18.0 | 19.3 | 20.5 | 22.0 | 23.1 | 24.7 |
| 750       | 17.7                     | 18.6 | 20.0 | 21.1 | 22.7 | 23.9 | 25.6 |
| 775       | 18.3                     | 19.2 | 20.6 | 21.8 | 23.4 | 24.7 | 26.4 |
| 800       | 18.9                     | 19.8 | 21.3 | 22.5 | 24.1 | 25.4 | 27.2 |



**STATIC RADIAL DEFLECTION – 245/645-18x9.0J @ CA -3.0° DH**

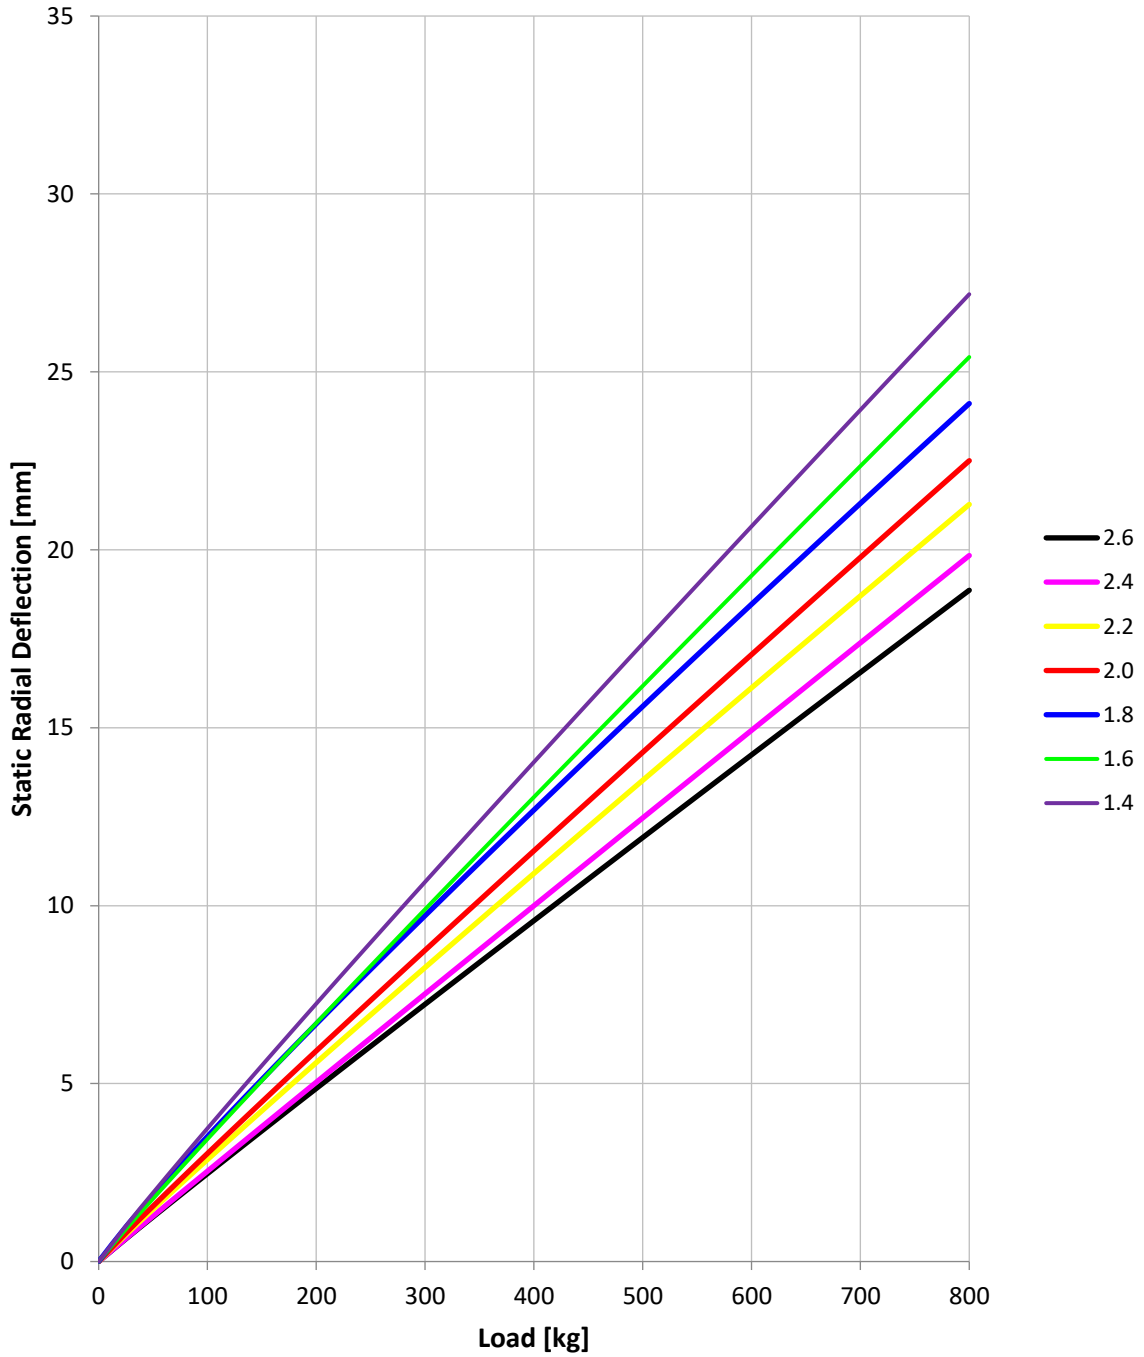




**STATIC RADIAL DEFLECTION – 245/645-18x9.0J @ CA 0.0 ° DHB**

| Load [kg] | Inflation Pressure [bar] |      |      |      |      |      |      |
|-----------|--------------------------|------|------|------|------|------|------|
|           | 2.6                      | 2.4  | 2.2  | 2.0  | 1.8  | 1.6  | 1.4  |
| 0         | 0.0                      | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  |
| 25        | 0.8                      | 0.8  | 0.8  | 0.8  | 0.9  | 1.0  | 1.1  |
| 50        | 1.5                      | 1.5  | 1.6  | 1.7  | 1.8  | 2.0  | 2.1  |
| 75        | 2.2                      | 2.2  | 2.4  | 2.5  | 2.7  | 2.9  | 3.2  |
| 100       | 2.9                      | 3.0  | 3.1  | 3.3  | 3.5  | 3.8  | 4.2  |
| 125       | 3.6                      | 3.7  | 3.9  | 4.1  | 4.4  | 4.7  | 5.1  |
| 150       | 4.3                      | 4.4  | 4.6  | 4.9  | 5.2  | 5.6  | 6.1  |
| 175       | 4.9                      | 5.0  | 5.4  | 5.6  | 6.0  | 6.5  | 7.1  |
| 200       | 5.6                      | 5.7  | 6.1  | 6.4  | 6.8  | 7.4  | 8.0  |
| 225       | 6.2                      | 6.4  | 6.8  | 7.1  | 7.6  | 8.2  | 8.9  |
| 250       | 6.8                      | 7.0  | 7.4  | 7.8  | 8.3  | 9.1  | 9.8  |
| 275       | 7.4                      | 7.6  | 8.1  | 8.5  | 9.1  | 9.9  | 10.7 |
| 300       | 8.0                      | 8.2  | 8.8  | 9.2  | 9.9  | 10.7 | 11.6 |
| 325       | 8.6                      | 8.9  | 9.4  | 9.9  | 10.6 | 11.5 | 12.4 |
| 350       | 9.2                      | 9.5  | 10.1 | 10.6 | 11.3 | 12.3 | 13.3 |
| 375       | 9.8                      | 10.1 | 10.7 | 11.3 | 12.0 | 13.1 | 14.1 |
| 400       | 10.3                     | 10.6 | 11.3 | 11.9 | 12.8 | 13.8 | 14.9 |
| 425       | 10.9                     | 11.2 | 11.9 | 12.6 | 13.5 | 14.6 | 15.7 |
| 450       | 11.5                     | 11.8 | 12.6 | 13.3 | 14.1 | 15.3 | 16.5 |
| 475       | 12.0                     | 12.4 | 13.2 | 13.9 | 14.8 | 16.1 | 17.3 |
| 500       | 12.5                     | 12.9 | 13.8 | 14.5 | 15.5 | 16.8 | 18.1 |
| 525       | 13.1                     | 13.5 | 14.3 | 15.2 | 16.2 | 17.5 | 18.9 |
| 550       | 13.6                     | 14.0 | 14.9 | 15.8 | 16.8 | 18.2 | 19.6 |
| 575       | 14.1                     | 14.5 | 15.5 | 16.4 | 17.5 | 18.9 | 20.4 |
| 600       | 14.6                     | 15.1 | 16.1 | 17.0 | 18.1 | 19.6 | 21.1 |
| 625       | 15.1                     | 15.6 | 16.6 | 17.6 | 18.8 | 20.3 | 21.9 |
| 650       | 15.6                     | 16.1 | 17.2 | 18.2 | 19.4 | 21.0 | 22.6 |
| 675       | 16.1                     | 16.6 | 17.7 | 18.8 | 20.0 | 21.7 | 23.3 |
| 700       | 16.6                     | 17.1 | 18.3 | 19.3 | 20.7 | 22.4 | 24.0 |
| 725       | 17.1                     | 17.6 | 18.8 | 19.9 | 21.3 | 23.0 | 24.7 |
| 750       | 17.5                     | 18.1 | 19.3 | 20.5 | 21.9 | 23.7 | 25.4 |
| 775       | 18.0                     | 18.6 | 19.9 | 21.1 | 22.5 | 24.3 | 26.1 |
| 800       | 18.5                     | 19.1 | 20.4 | 21.6 | 23.1 | 25.0 | 26.8 |



STATIC RADIAL DEFLECTION – 245/645-18x9.0J @ CA 0.0° DHB

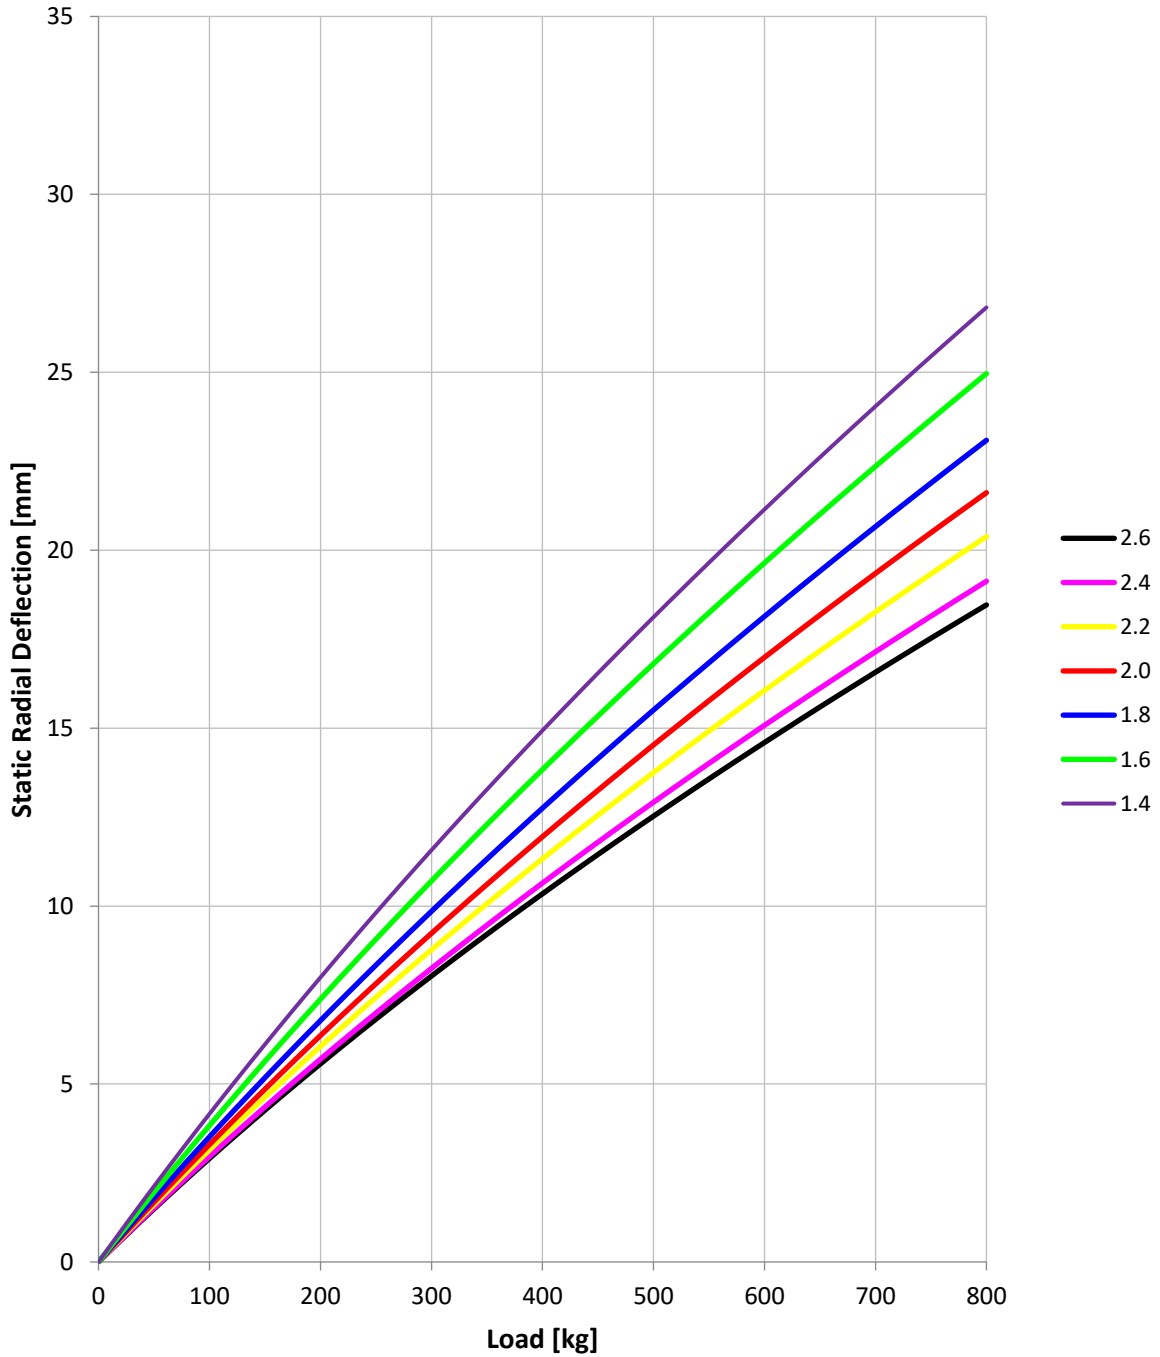



**STATIC RADIAL DEFLECTION – 245/645-18x9.0J @ CA -3.0 ° DHB**

| Load [kg] | Inflation Pressure [bar] |      |      |      |      |      |      |
|-----------|--------------------------|------|------|------|------|------|------|
|           | 2.6                      | 2.4  | 2.2  | 2.0  | 1.8  | 1.6  | 1.4  |
| 0         | 0.0                      | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  |
| 25        | 0.9                      | 0.9  | 1.0  | 1.0  | 1.1  | 1.1  | 1.2  |
| 50        | 1.7                      | 1.8  | 1.9  | 2.0  | 2.1  | 2.2  | 2.4  |
| 75        | 2.6                      | 2.6  | 2.8  | 2.9  | 3.1  | 3.3  | 3.5  |
| 100       | 3.3                      | 3.5  | 3.7  | 3.8  | 4.0  | 4.3  | 4.6  |
| 125       | 4.1                      | 4.3  | 4.5  | 4.7  | 4.9  | 5.3  | 5.7  |
| 150       | 4.9                      | 5.0  | 5.3  | 5.5  | 5.8  | 6.3  | 6.7  |
| 175       | 5.6                      | 5.8  | 6.1  | 6.3  | 6.7  | 7.2  | 7.7  |
| 200       | 6.3                      | 6.5  | 6.9  | 7.1  | 7.6  | 8.1  | 8.7  |
| 225       | 7.0                      | 7.2  | 7.6  | 7.9  | 8.4  | 9.0  | 9.6  |
| 250       | 7.6                      | 7.9  | 8.3  | 8.7  | 9.2  | 9.9  | 10.6 |
| 275       | 8.3                      | 8.6  | 9.0  | 9.4  | 10.1 | 10.8 | 11.5 |
| 300       | 8.9                      | 9.2  | 9.7  | 10.2 | 10.8 | 11.6 | 12.4 |
| 325       | 9.6                      | 9.9  | 10.4 | 10.9 | 11.6 | 12.4 | 13.3 |
| 350       | 10.2                     | 10.5 | 11.1 | 11.6 | 12.4 | 13.3 | 14.2 |
| 375       | 10.8                     | 11.1 | 11.7 | 12.3 | 13.1 | 14.1 | 15.0 |
| 400       | 11.4                     | 11.7 | 12.4 | 13.0 | 13.8 | 14.8 | 15.8 |
| 425       | 11.9                     | 12.3 | 13.0 | 13.6 | 14.6 | 15.6 | 16.7 |
| 450       | 12.5                     | 12.9 | 13.6 | 14.3 | 15.3 | 16.4 | 17.5 |
| 475       | 13.1                     | 13.5 | 14.2 | 14.9 | 16.0 | 17.1 | 18.3 |
| 500       | 13.6                     | 14.0 | 14.8 | 15.6 | 16.7 | 17.9 | 19.1 |
| 525       | 14.2                     | 14.6 | 15.4 | 16.2 | 17.3 | 18.6 | 19.8 |
| 550       | 14.7                     | 15.1 | 16.0 | 16.8 | 18.0 | 19.3 | 20.6 |
| 575       | 15.2                     | 15.7 | 16.5 | 17.4 | 18.7 | 20.0 | 21.3 |
| 600       | 15.7                     | 16.2 | 17.1 | 18.0 | 19.3 | 20.7 | 22.1 |
| 625       | 16.2                     | 16.7 | 17.6 | 18.6 | 19.9 | 21.4 | 22.8 |
| 650       | 16.7                     | 17.3 | 18.2 | 19.2 | 20.6 | 22.1 | 23.5 |
| 675       | 17.2                     | 17.8 | 18.7 | 19.8 | 21.2 | 22.7 | 24.2 |
| 700       | 17.7                     | 18.3 | 19.3 | 20.3 | 21.8 | 23.4 | 24.9 |
| 725       | 18.2                     | 18.8 | 19.8 | 20.9 | 22.4 | 24.0 | 25.6 |
| 750       | 18.7                     | 19.3 | 20.3 | 21.4 | 23.0 | 24.7 | 26.3 |
| 775       | 19.2                     | 19.8 | 20.8 | 22.0 | 23.6 | 25.3 | 27.0 |
| 800       | 19.6                     | 20.2 | 21.3 | 22.5 | 24.2 | 25.9 | 27.7 |



**STATIC RADIAL DEFLECTION – 245/645-18x9.0J @ CA -3.0° DHB**

